


ZD0760



(GB) VC02SW
 Meter Box Switch
 Notice d'instructions
 User instructions
 Bedienungsanleitung
 Instrucciones de uso
 Instruções
 Bruksanvisning
 Gebruiksaanwijzing

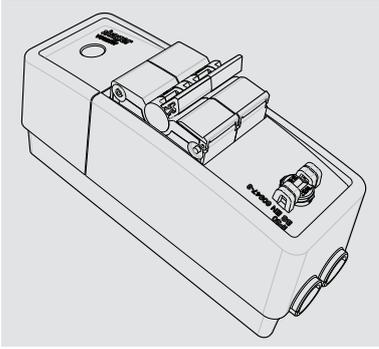

Scan with your smartphone QR scanner to be taken straight to the Meter Box Switch features video, or visit hager.co.uk/youtube




Complies with BS EN 60947-3 which facilitates the installation to comply with BS7671 IET wiring regulations in particular the guidance in table 53.4.

Rated insulation voltage (U_i) 300V
 Rated impulse voltage (U_{imp}) 6kV
 Pollution degree: 2
 Rated duty: uninterrupted duty


Rated short-time withstand current: 1500 A/1s
 Rated short-circuit making capacity: 2115A
 Rated conditional short-circuit (I_{co})* 16kA
 Type of conductors: Rigid 16/25/35mm²

*Short-circuit protective device: 100A BS 88-3 Fuse. (Fuses mainly for household or similar applications)


Screw base & switch to the surface (switch can be removed via DIN rail clips to reduce risk of debris in terminals if required)

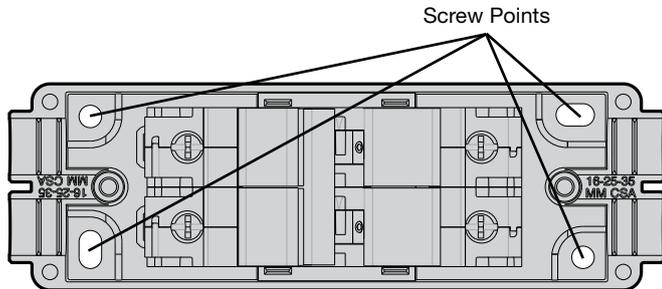


Strip/dress cables, 16/25/35mm² can be used (17mm strip length required)



Connect cables to the terminals in the switch and tighten the terminal screws to 3.6Nm of torque.

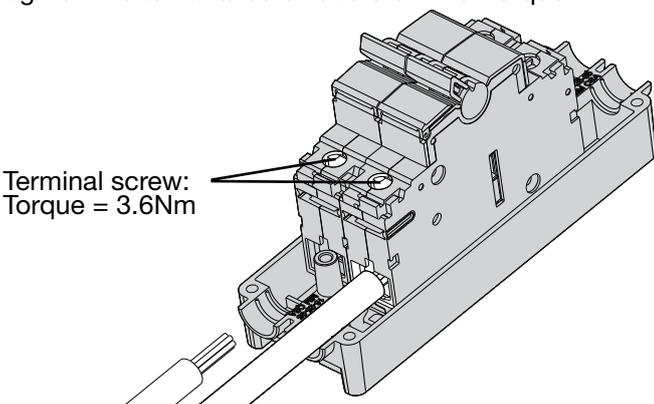


Cut/twist apart the two cable clamps and wire seal cap and trim tabs with knife/cutters as required.

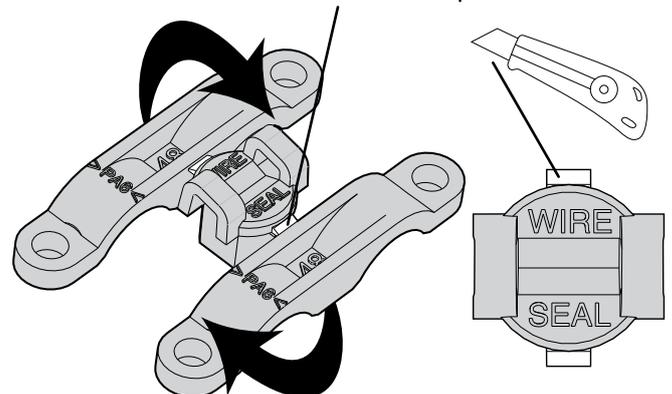



ZD0760

Fit one cable clamp at each end with screws supplied (PZ2). Alternate between screws while tightening to provide even clamping.

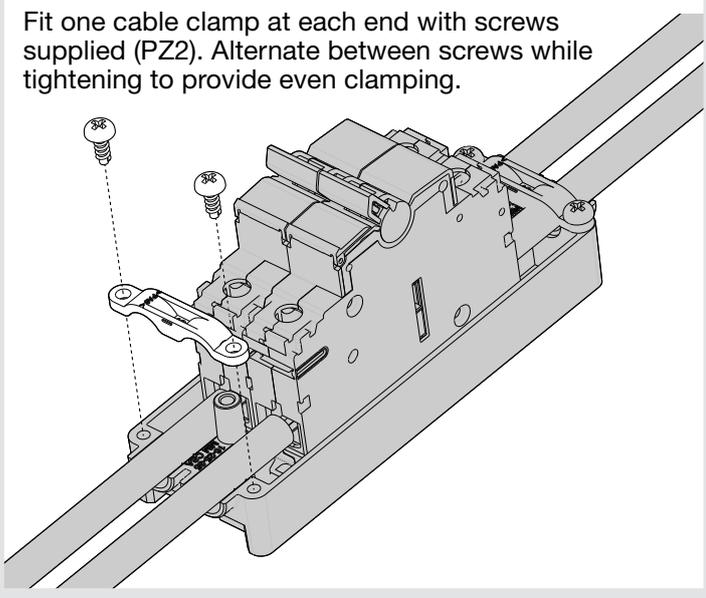


ZD0760


Assemble the covers as appropriate. For initial installation by supply authority please use large cover for incoming supply side of switch. A wire seal cap is supplied to allow a wire/security seal to be fitted to the product. Hager part ref MZN176.

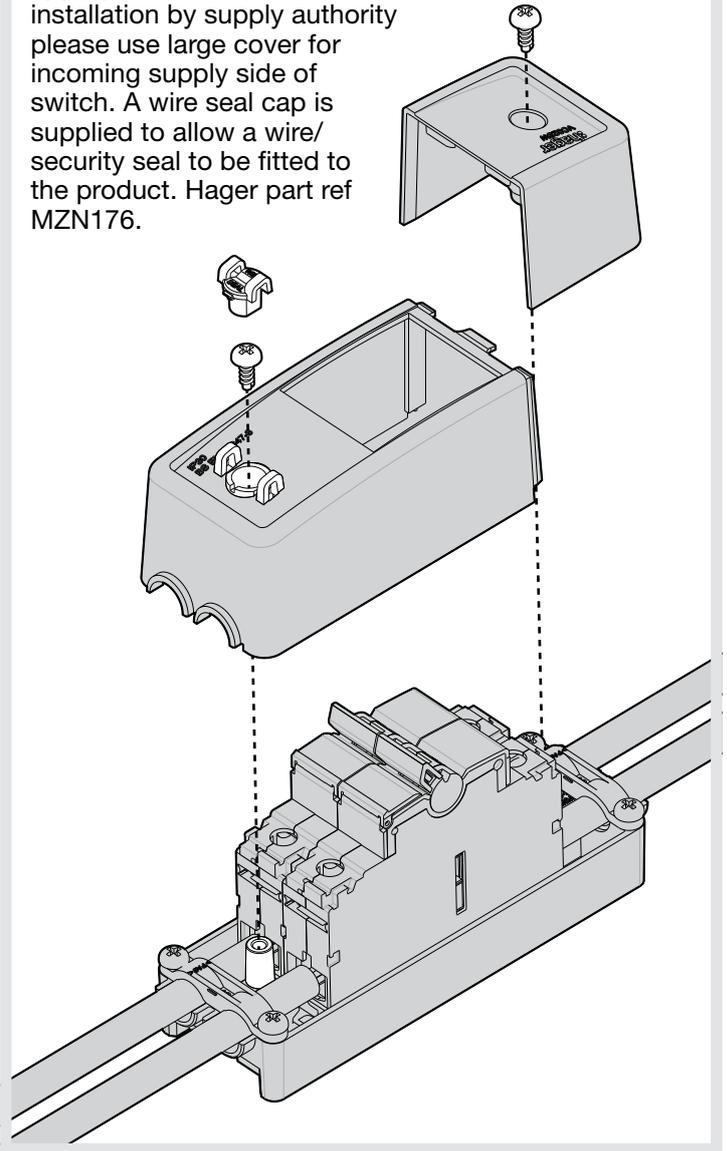


x 6 ZB0217

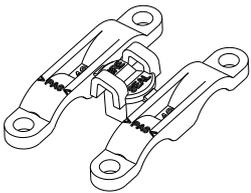


x 1 ZM0248 (3 parts)

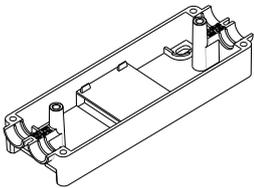


x 1 ZM0245



x 1 ZM0247




x 1 ZM0246



x 1 SBR290 (100A)

Typical wire seal arrangement

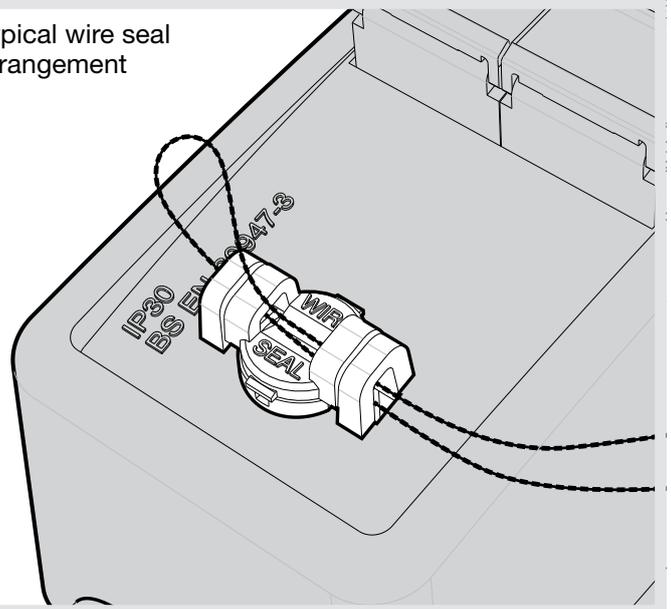

ZD0760